




**12273160 - SHIELD SOCK ADAPTER, STRAIGHT**  
 MIL-DTL-5015 CRIMP REAR RELEASE; MIL-DTL-26482 SERIES II;  
 MIL-DTL-83723 SERIES III

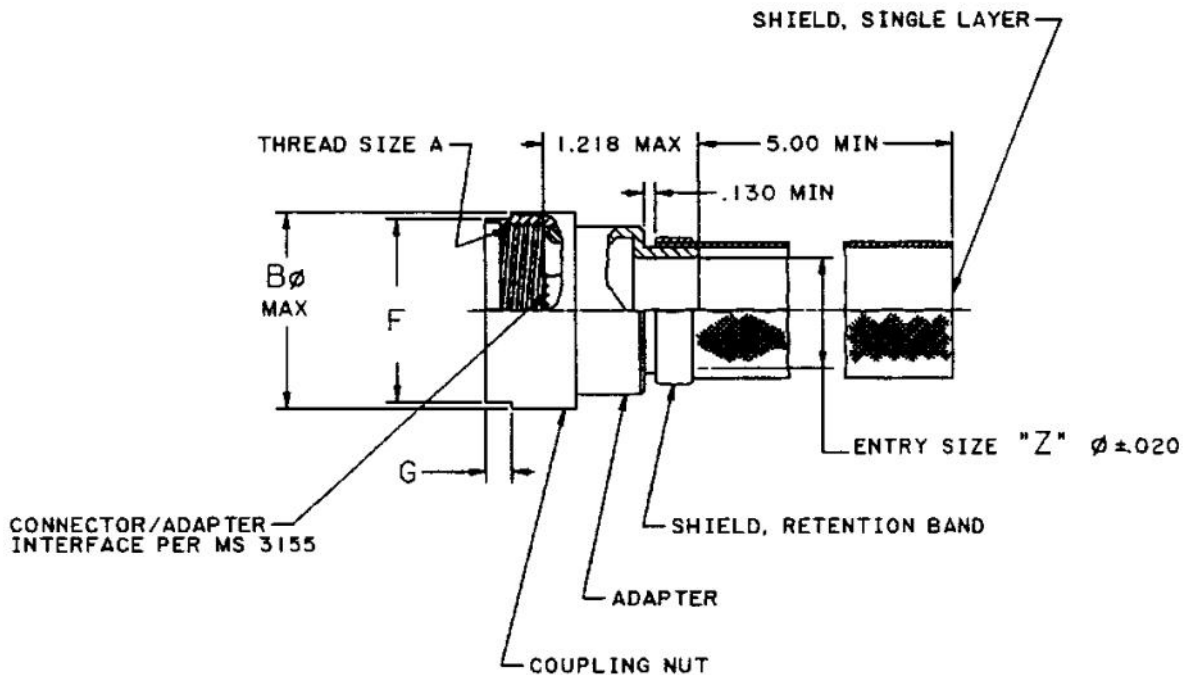

**NOTES**

1. Material - Aluminum Alloy 6061-T6
2. Braid is copper wire per QQ-B-575  
 36 AWG for entry diameters to 1.000  
 30 AWG for entry diameters larger than 1.000
3. Adapter to shield joint to withstand 125 lb pull test
4. D.C. Resistance between shield and adapter body .001 Ohms Max
5. The adapter when used with a heat shrinkable boot and appropriate connector shall show no evidence of leakage when submerged to a depth of six feet of water for five minutes.

Part Number Designator			
12273160-	08	1	1
Finish			
1 - Cadmium, Clear AMS-QQ-P-416, type II, with supplementary chromate treatment			
2 - Electroless nickel coating, ASTM B733			
Entry Size - See Table II			
Shell Size - See Table I			
Basic Part Number			

**DISCLAIMER**  
 ALL INFORMATION IN THIS SPECIFICATION, INCLUDING ILLUSTRATIONS, IS BELIEVED TO BE RELIABLE. READERS, HOWEVER, SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF EACH PRODUCT FOR THEIR APPLICATION. COMPAERO MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION, AND DISCLAIMS ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. IN ADDITION, COMPAERO RESERVES THE RIGHT TO MAKE CHANGES—WITHOUT NOTIFICATION TO CUSTOMERS—TO PROCESSING OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION.

**12273160 - SHIELD SOCK ADAPTER, STRAIGHT**  
**MIL-DTL-5015 CRIMP REAR RELEASE; MIL-DTL-26482 SERIES II;**  
**MIL-DTL-83723 SERIES III**



**TABLE I - All Dimensions in Inches**

<b>SHELL SIZE</b>	<b>A Thread Class 2B</b>	<b>B MAX DIA</b>	<b>F Wrench Flats +/- .015</b>	<b>G +/- .031</b>
08	0.500 - 20 UNF	0.781	0.625	0.313
10	0.625 - 24 UNEF	0.906	0.750	0.313
12	0.750 - 20 UNEF	1.031	0.875	0.313
14	0.875 - 20 UNEF	1.156	1.000	0.313
16	1.000 - 20 UNEF	1.281	1.125	0.313
18	1.0625-18 UNEF	1.343	1.188	0.313
20	1.1875 - 18 UNEF	1.469	1.312	0.313
22	1.3125 - 18 UNEF	1.593	1.438	0.313
24	1.4375 - 18 UNEF	1.719	1.562	0.313
28	1.750 - 18 UNEF	2.031	1.875	0.313
32	2.000 - 18 UNEF	2.281	2.125	0.313

**TABLE II - ENTRY SIZE Z**

1	0.250
2	0.312
3	0.438
4	0.500
5	0.625
6	0.750
7	0.875
8	1.000
9	1.250
0	1.500

**DISCLAIMER**

ALL INFORMATION IN THIS SPECIFICATION, INCLUDING ILLUSTRATIONS, IS BELIEVED TO BE RELIABLE. READERS, HOWEVER, SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF EACH PRODUCT FOR THEIR APPLICATION. COMPAERO MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION, AND DISCLAIMS ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. IN ADDITION, COMPAERO RESERVES THE RIGHT TO MAKE CHANGES—WITHOUT NOTIFICATION TO CUSTOMERS—TO PROCESSING OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION.