

313C722-774


**CONVOLUTED BOOT,
LOW PROFILE
WITH ADAPTER LIP**




This style is used with a circular grooved adapter to provide strain relief and, if adhesive is used, environmental sealing.

The convoluted design provides the flexibility to accommodate different cable outlet angles.

EXPANDED, AS SUPPLIED, PART

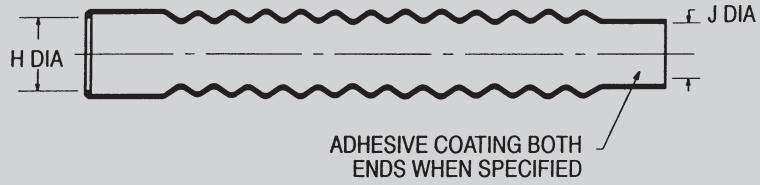

FULLY RECOVERED PART (AFTER HEATING)

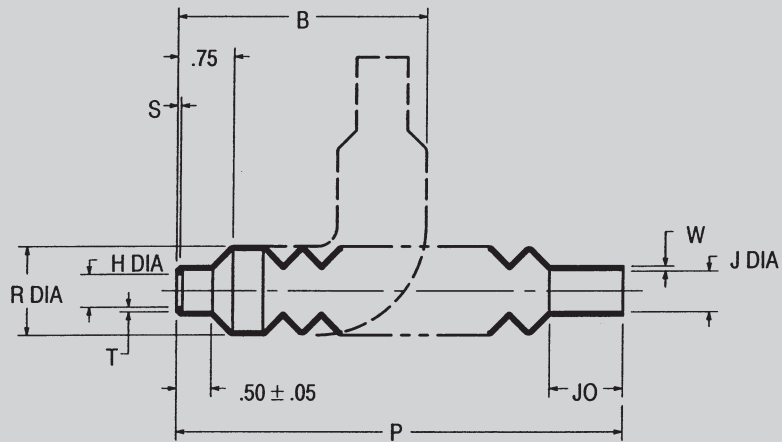

1. All dimensions are in inches – all angles in degrees.
2. Dimensions in table:
X = Expanded (minimum);
R = Recovered (maximum)
3. Colour: Black

Part Number	H DIA		J DIA		P ±10% R	R MAX R	JO ±10% R	W ±.030 R	B NOM R	T ±0.03 R	S ±.03 R
	MIN X	MAX R	MIN X	MAX R							
313C722	0.56	0.27	0.44	0.19	4.75	0.83	0.69	0.060	2.46	0.05	0.06
313C732	0.88	0.46	0.70	0.32	5.25	1.05	0.78	0.060	2.67	0.05	0.06
313C743	1.34	0.69	1.06	0.50	5.75	1.29	0.88	0.060	2.89	0.05	0.07
313C753	1.74	0.88	1.44	0.69	6.25	1.49	1.00	0.060	3.08	0.05	0.07
313C764	2.12	1.10	1.80	0.88	6.75	1.69	1.12	0.060	3.26	0.08	0.07
313C774	3.04	1.60	2.15	0.90	9.30	2.45	1.38	0.060	5.45	0.08	0.08

MATERIALS AVAILABLE

- 6 Flexible Flame Retardant Polyolefin
- 8 Viton-Polyester Polymer Blend
- 9 Modified Elastomer Blend

ADHESIVE OPTIONS

Adhesive (Part Numbers)	Factory Applied	Description
TSA-200	-200	Thermoset 125°C
TTS-250	-250	Thermoplastic 80°C
TTS-450	-450	Thermoplastic 120°C
W24	W24	1 Part Epoxy 200°C

Larger expansions available on request for -6 material