


# 313F322-396

**STRAIGHT BOOT,  
LOW PROFILE  
WITH ADAPTER LIP**




This boot provides strain relief in applications with partially loaded connectors, resulting in small cable diameters requiring a high shrink ratio.

### EXPANDED, AS SUPPLIED, PART

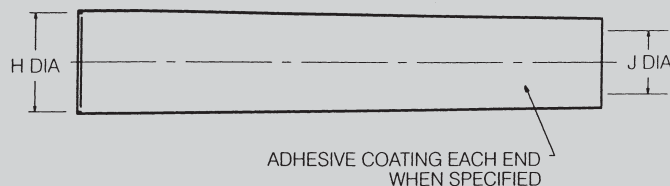

### FULLY RECOVERED PART (AFTER HEATING)

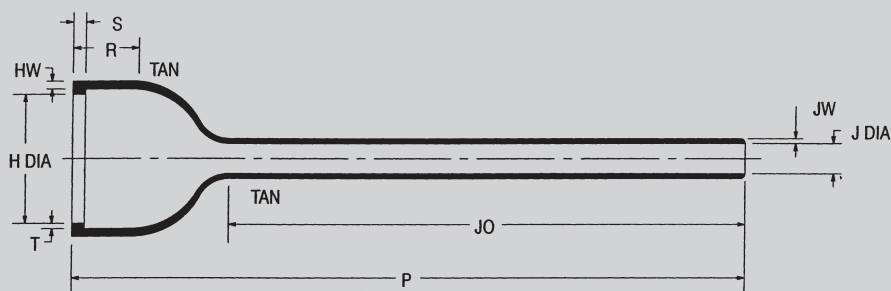

1. All dimensions are in inches – all angles in degrees.
2. Dimensions in table:  
X = Expanded (minimum);  
R = Recovered (maximum)
3. Colour: Black

Part Number	H DIA		J DIA		P ±10% R	R ±15% R	T ±0.03 R	JO ±10% R	HW +0.06 -0.03 R	JW ±0.03 R	S +0.06 -0.03 R
	MIN X	MAX R	MIN X	MAX R							
313F322	0.94	0.39	0.68	0.26	4.17	0.46	0.05	3.40	0.06	0.06	0.06
313F332	1.07	0.52	0.82	0.30	4.77	0.48	0.05	3.88	0.06	0.06	0.06
313F343	1.22	0.73	0.96	0.35	5.46	0.48	0.05	4.44	0.07	0.06	0.07
313F353	1.40	0.87	1.13	0.40	6.28	0.48	0.05	5.15	0.07	0.06	0.07
313F364	1.53	1.11	1.24	0.43	7.00	0.55	0.07	5.60	0.07	0.06	0.07
313F374	1.78	1.27	1.51	0.50	8.00	0.60	0.07	6.42	0.07	0.06	0.07
313F385	2.03	1.79	1.79	0.59	8.00	0.60	0.07	6.21	0.07	0.07	0.07
313F396	2.47	1.79	2.10	0.66	9.00	0.63	0.07	6.03	0.07	0.07	0.07

### MATERIALS AVAILABLE

- 6 Flexible Flame Retardant Polyolefin
- 8 Viton-Polyester Polymer Blend
- 9 Modified Elastomer Blend

### ADHESIVE OPTIONS

Adhesive (Part Numbers)	Factory Applied	Description
TSA-200	-200	Thermoset 125°C
TTS-250	-250	Thermoplastic 80°C
TTS-450	-450	Thermoplastic 120°C
W24	W24	1 Part Epoxy 200°C

Larger expansions available on request for -6 material