

SERIES
75

EMI/RFI NON-ENVIRONMENTAL BACKSHELL
CP*751, CP*753, CP*754, CP*758, CP*759
INNER AND OUTER SHIELD TERMINATION (2 OR 3 RINGS)

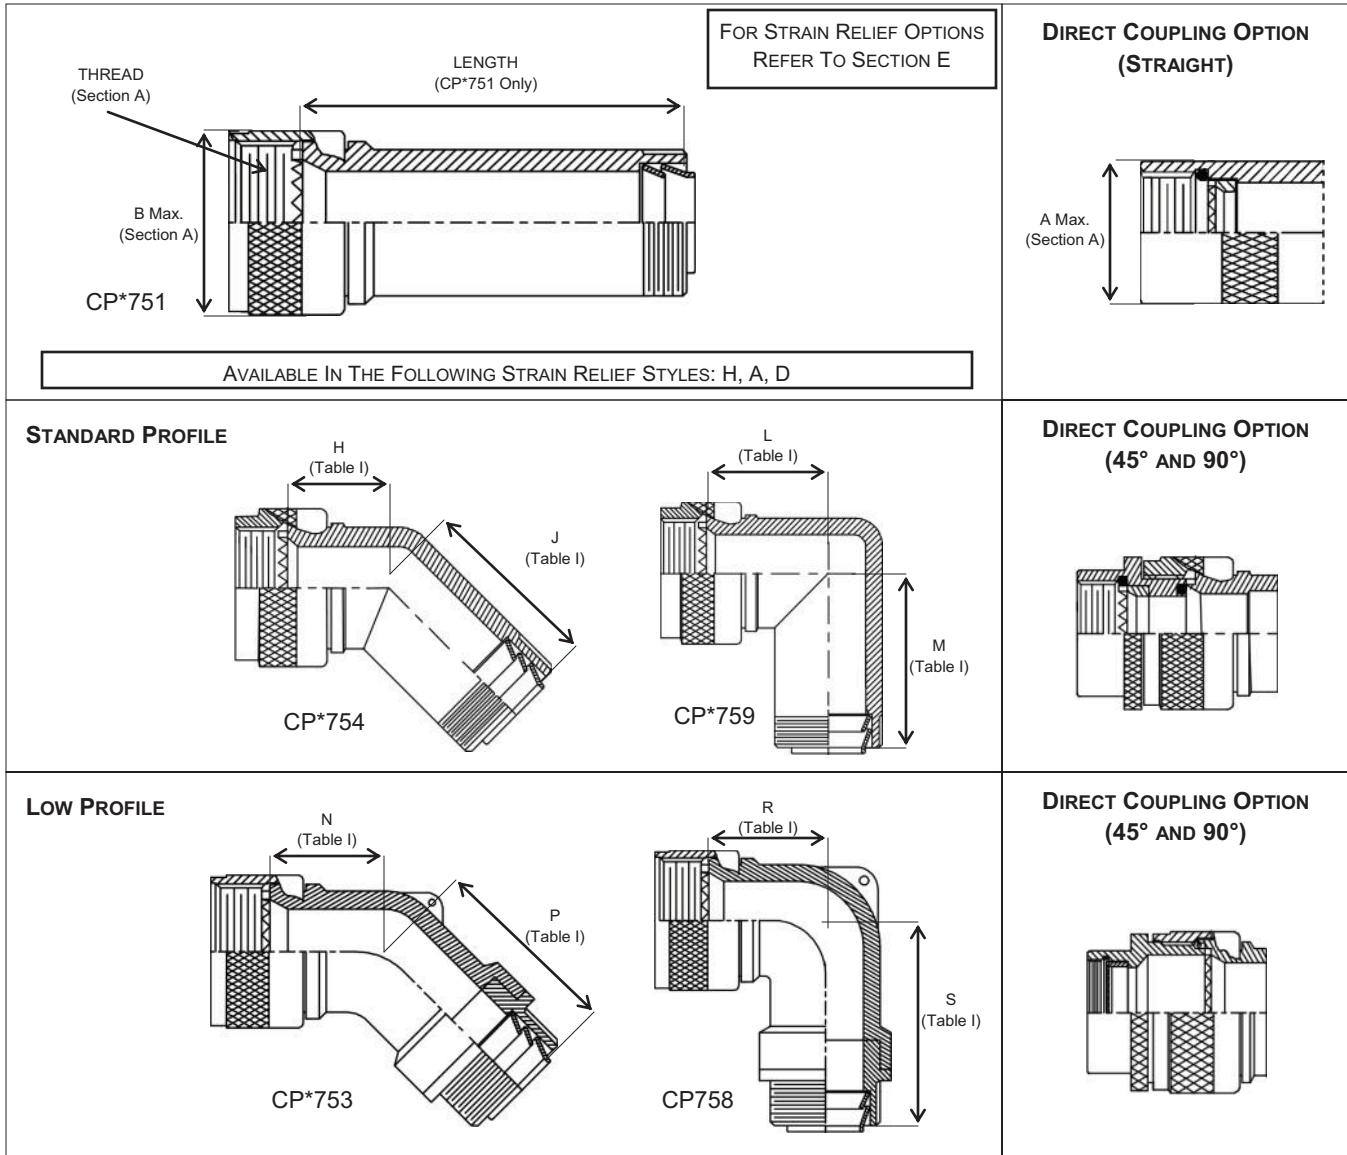


TABLE I
DIMENSIONAL CHART - 45 AND 90 DEGREE ADAPTERS


SHELL SIZE	H MAX	J MAX	L MAX	M MAX	N MAX	P MAX	R MAX	S MAX
8, 9 (A)	.639 (16.2)	.950 (24.1)	.750 (19.1)	1.060 (26.9)	.457 (11.6)	1.470 (37.3)	.500 (12.7)	1.480 (37.6)
10, 11 (B)	.664 (16.9)	.980 (24.9)	.810 (20.6)	1.120 (28.4)	.520 (13.2)	1.530 (38.9)	.595 (15.1)	1.600 (40.6)
12, 13 (C)	.688 (17.5)	1.000 (25.4)	.870 (22.1)	1.180 (30.0)	.582 (14.8)	1.590 (40.4)	.610 (15.5)	1.620 (41.1)
14, 15 (D)	.705 (17.9)	1.030 (26.2)	.920 (23.4)	1.250 (31.8)	.645 (16.4)	1.680 (42.7)	.700 (17.8)	1.690 (42.9)
16, 17 (E)	.732 (18.6)	1.050 (26.7)	.980 (24.9)	1.310 (33.3)	.738 (18.7)	1.790 (45.5)	.885 (22.5)	1.950 (49.5)
18, 19 (F)	.748 (19.0)	1.060 (26.9)	1.020 (25.9)	1.330 (33.8)	.926 (23.5)	1.980 (50.3)	.975 (24.8)	2.060 (52.3)
20, 21 (G)	.773 (19.6)	1.080 (27.4)	1.080 (27.4)	1.390 (35.3)	.926 (23.5)	1.980 (50.3)	.975 (24.8)	2.060 (52.3)
22, 23 (H)	.800 (20.3)	1.120 (28.4)	1.140 (29.0)	1.470 (37.3)	1.020 (25.9)	2.130 (54.1)	1.125 (28.6)	2.060 (52.3)
24, 25 (J)	.823 (20.9)	1.150 (29.2)	1.200 (30.5)	1.540 (39.1)	1.020 (25.9)	2.130 (54.1)	1.125 (28.6)	2.060 (52.3)




EMI/RFI NON-ENVIRONMENTAL BACKSHELL
CP*751, CP*753, CP*754, CP*758, CP*759
PART NUMBER BREAKDOWN & CROSS REFERENCE

SERIES
75

SERIES 75 - PART NUMBER BREAKDOWN / HOW TO ORDER

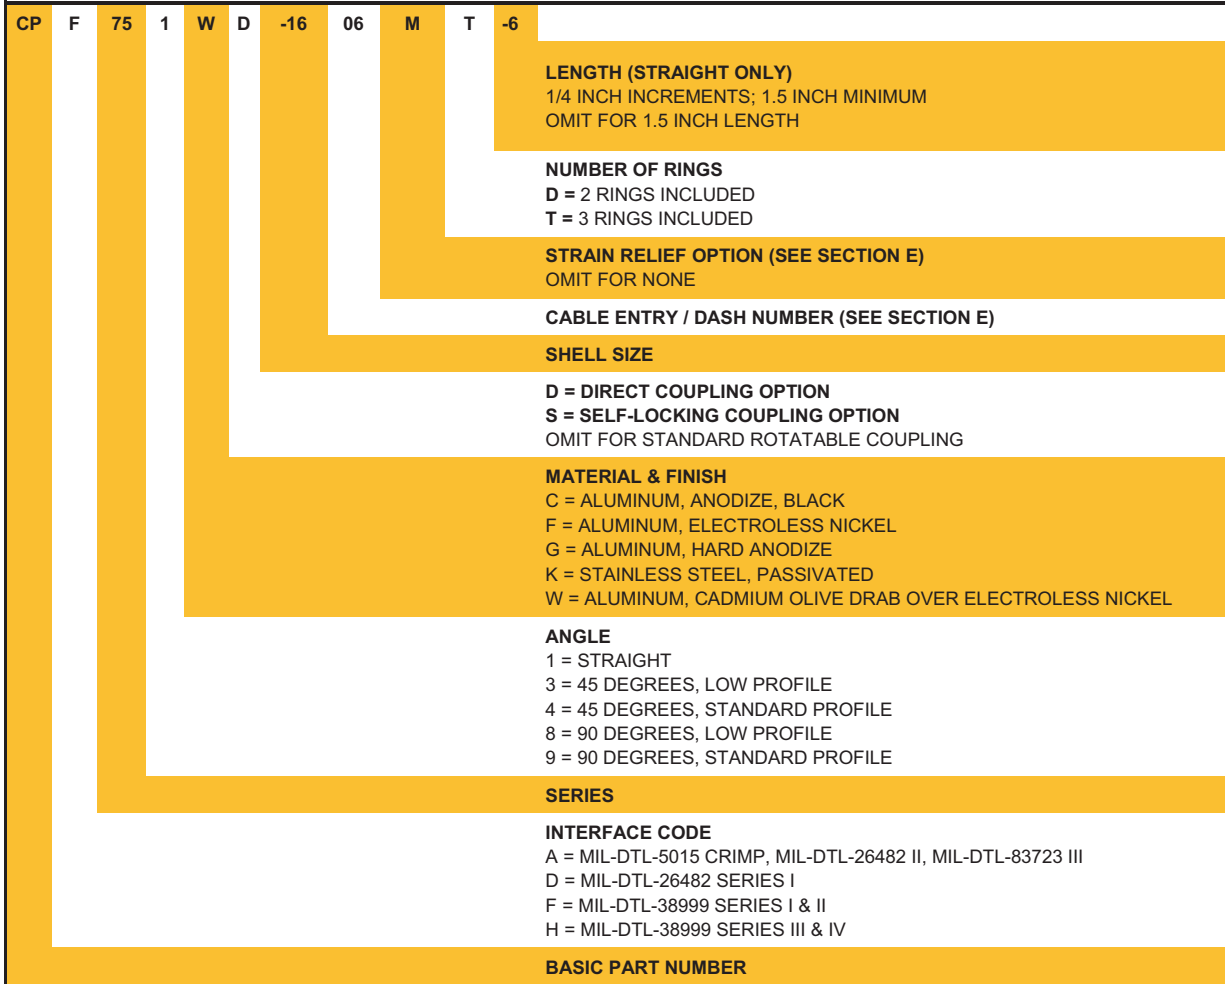

CROSS REFERENCE INFORMATION - FOR COMPLETE BREAKDOWN SEE APPENDIX A

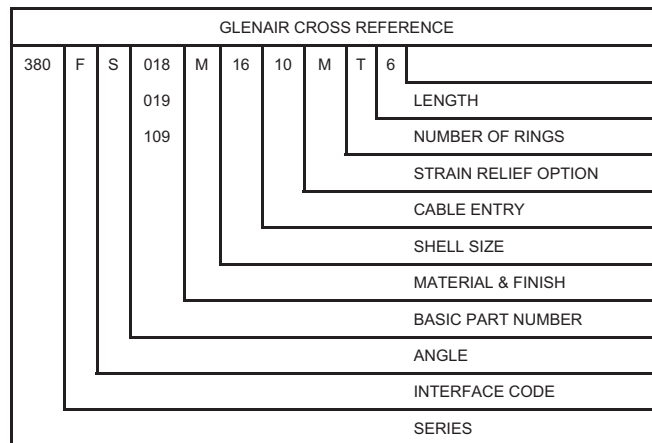

DISCLAIMER

ALL INFORMATION IN THIS CATALOG, INCLUDING ILLUSTRATIONS, IS BELIEVED TO BE RELIABLE. READERS, HOWEVER, SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF EACH PRODUCT FOR THEIR APPLICATION. COMPAERO MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION, AND DISCLAIMS ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. IN ADDITION, COMPAERO RESERVES THE RIGHT TO MAKE CHANGES—WITHOUT NOTIFICATION TO CUSTOMERS—TO PROCESSING OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION.

CONNECTOR INTERFACE DIMENSION TABLE							
CONNECTOR INTERFACE							
A	D, F	H	THREAD	A DIA MAX	B DIA MAX	C DIA MAX	D DIA MAX
	8, 9		7/16 – 28 UNEF	.590 (15.)	.650 (16.5)	.770 (19.6)	.690 (17.5)
		9 (A)	M12 x 1 – 6H	.650 (16.5)	.770 (19.6)	.770 (19.6)	.940 (24.8)
8			1/2 – 20 UNF	.650 (16.5)	.650 (16.5)	.650 (16.5)	.690 (17.5)
	10, 11		9/16 – 24 UNEF	.720 (18.3)	.770 (19.6)	.890 (22.6)	.820 (20.8)
		11 (B)	M15 x 1 – 6H	.770 (19.6)	.820 (20.8)	.820 (20.8)	1.060 (26.9)
10			5/8 – 24 UNEF	.770 (19.6)	.770 (19.6)	.890 (22.6)	.820 (20.8)
	12, 13		11/16 – 24 UNEF	.840 (21.3)	.890 (22.6)	1.020 (25.9)	.940 (23.8)
		13 (C)	M18 x 1 – 6H	.890 (22.6)	.940 (23.9)	.940 (23.9)	1.170 (29.7)
12			3/4 – 20 UNEF	.970 (24.6)	.940 (23.9)	1.020 (25.9)	.940 (23.8)
	14, 15		13/16 – 20 UNEF	.970 (24.6)	1.020 (29.2)	1.150 (29.2)	1.060 (26.9)
		15 (D)	M22 x 1 – 6H	1.030 (26.2)	1.070 (26.2)	1.070 (26.2)	1.290 (32.7)
14			7/8 – 20 UNEF	1.090 (27.7)	1.020 (25.9)	1.150 (29.2)	1.060 (26.9)
	16, 17		15/16 – 20 UNEF	1.090 (27.7)	1.150 (29.2)	1.260 (32.0)	1.170 (29.7)
		17 (E)	M25 x 1 – 6H	1.150 (29.2)	1.210 (30.7)	1.210 (30.7)	1.420 (36.1)
16			1 – 20 UNEF	1.220 (29.2)	1.210 (30.7)	1.230 (31.2)	1.170 (29.7)
18	18, 19		1 1/16 – 18 UNEF	1.220 (31.0)	1.230 (31.2)	1.400 (35.6)	1.290 (32.7)
		19 (F)	M28 x 1 – 6H	1.280 (32.5)	1.360 (34.5)	1.360 (34.5)	1.540 (39.1)
20	20, 21		1 3/16 – 18 UNEF	1.340 (34.0)	1.360 (34.5)	1.530 (38.9)	1.420 (36.0)
		21 (G)	M31 x 1 – 6H	1.410 (35.8)	1.480 (37.6)	1.480 (37.6)	1.670 (42.4)
22	22, 23		1 5/16 – 18 UNEF	1.470 (37.3)	1.480 (37.6)	1.600 (40.6)	1.540 (39.1)
		23 (H)	M34 x 1 – 6H	1.530 (38.9)	1.600 (40.6)	1.600 (40.6)	2.010 (51.1)
24	24, 25		1 7/16 – 18 UNEF	1.590 (40.4)	1.730 (43.9)	1.940 (49.3)	1.660 (42.2)
		25 (J)	M37 x 1 – 6H	1.660 (42.2)	1.700 (43.2)	1.700 (43.2)	2.120 (53.8)
28			1 3/4 – 18 UNS	1.970 (50.0)	1.970 (50.0)	1.970 (50.0)	2.010 (51.1)
32			2 – 18 UNS	2.280 (57.9)	2.220 (56.4)	2.220 (56.4)	2.260 (57.4)
36			2 1/4 – 16 UN	2.530 (64.3)	2.47 (62.7)	2.47 (62.7)	2.530 (64.3)


**SECTION
E**

STRAIN RELIEF SPECIFICATIONS




LIGHT DUTY

STYLE A
CP85049/41
(CP3057-**A)




STYLE D
STYLE G




HEAVY DUTY

STYLE H
CP85049/42
(CP3057-**D)




MEDIUM DUTY

STYLE J

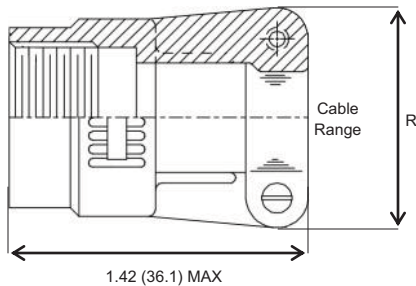

STYLE C
CP85049/2
CP3057-**C)



STYLE E




TABLE II - DIMENSIONAL CHART - FOR STRAIN RELIEF ADAPTERS

DASH	R MAX	S MAX	T MAX	U MAX	V MAX	W MAX	Y MAX	Z MAX
01	.781 (19.8)	.630 (16.0)	.780 (19.8)	1.375 (34.9)	.957 (24.3)	.437 (11.1)	.812 (20.6)	.812 (20.6)
02	.968 (24.6)	.755 (19.2)	.780 (19.8)	1.375 (34.9)	1.145 (29.1)	.437 (11.1)	.875 (22.2)	.937 (23.8)
03	1.046 (26.6)	.942 (23.9)	.780 (19.8)	1.375 (34.9)	1.332 (33.8)	.500 (12.7)	1.062 (27.0)	1.062 (27.0)
04	1.156 (29.4)	1.067 (27.1)	.780 (19.8)	1.375 (34.9)	1.332 (33.8)	.563 (14.3)	1.156 (29.4)	1.188 (30.2)
05	1.218 (30.9)	1.192 (30.3)	.811 (20.6)	1.437 (36.5)	1.551 (39.4)	.563 (14.3)	1.250 (31.8)	1.312 (33.3)
06	1.343 (34.1)	1.380 (35.1)	.905 (23.0)	1.437 (36.5)	1.770 (45.0)	.563 (14.3)	1.469 (37.3)	1.562 (39.7)
07	1.468 (37.3)	1.535 (39.0)	1.092 (27.7)	1.562 (39.7)	2.113 (53.7)	.656 (16.7)	1.688 (42.9)	1.750 (44.5)
08	1.593 (40.5)	1.848 (46.9)	1.124 (28.5)	1.812 (46.0)	2.363 (60.0)	.656 (16.7)	2.031 (51.6)	2.250 (57.2)
09	1.718 (43.6)	2.255 (57.3)	1.399 (35.5)	2.062 (52.4)	2.770 (70.4)	.656 (16.7)	2.281 (57.9)	2.375 (60.3)
10	1.843 (46.8)	2.505 (63.6)	1.399 (35.5)	2.062 (52.4)	3.020 (76.7)	1.188 (30.2)	2.688 (68.3)	2.625 (66.7)
11	N/A	N/A	N/A	2.188 (55.6)	N/A	1.187 (30.1)	2.938 (74.6)	2.812 (71.4)
12	N/A	N/A	N/A	N/A	N/A	1.125 (28.6)	3.500 (88.9)	N/A



STRAIN RELIEF SPECIFICATIONS

SECTION E

TABLE I - CABLE RANGE - FOR STRAIN RELIEF ADAPTERS

DASH	STYLE 'H'		STYLE 'A' STYLE 'D'		STYLE 'J' STYLE 'G'		STYLE 'C' STYLE 'E'	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
01	N/A	N/A	.156 (4.0)	.250 (6.4)	.062 (1.6)	.125 (3.2)	.217 (5.5)	.219 (5.6)
02	.125 (3.2)	.312 (7.9)	.188 (4.8)	.312 (7.9)	.125 (3.2)	.250 (6.4)	.296 (7.5)	.312 (7.9)
03	.250 (6.4)	.437 (11.1)	.281 (7.1)	.438 (11.1)	.250 (6.4)	.375 (9.5)	.390 (9.9)	.438 (11.1)
04	.312 (7.9)	.562 (14.3)	.387 (9.8)	.562 (14.3)	.375 (9.5)	.500 (12.7)	.434 (11.0)	.531 (13.5)
05	.350 (8.9)	.625 (15.9)	.375 (9.5)	.625 (15.9)	.500 (12.7)	.625 (15.9)	.434 (11.0)	.625 (15.9)
06	.500 (12.7)	.750 (19.1)	.438 (11.1)	.750 (19.1)	.625 (15.9)	.750 (19.1)	.596 (15.1)	.750 (19.1)
07	.625 (15.9)	.937 (23.8)	.625 (15.9)	.938 (23.8)	.750 (19.1)	.875 (22.2)	.596 (15.1)	.938 (23.8)
08	.875 (22.2)	1.250 (31.8)	.875 (22.2)	1.250 (31.8)	.875 (22.2)	1.000 (25.4)	.858 (21.8)	1.250 (31.8)
09	1.000 (25.4)	1.375 (34.9)	1.000 (25.4)	1.375 (34.9)	1.000 (25.4)	1.125 (28.6)	.858 (21.8)	1.375 (34.9)
10	1.250 (31.8)	1.625 (41.3)	1.250 (31.8)	1.625 (41.3)	1.125 (28.6)	1.250 (31.8)	1.107 (28.1)	1.625 (41.3)
11	1.437 (36.5)	1.875 (47.6)	1.437 (36.5)	1.875 (47.6)	N/A	N/A	1.421 (36.1)	1.875 (47.6)
12	N/A	N/A	1.875 (47.6)	2.375 (60.3)	N/A	N/A	N/A	N/A

PART NUMBER BREAKDOWN / HOW TO ORDER

CP	F	73	1	W	D	-16	06	G	-6	
										STRAIN RELIEF OPTION (SEE TABLE I) OMIT FOR NONE
										CABLE ENTRY / DASH NUMBER (SEE TABLE I)

TABLE III - CROSS REFERENCE TABLE - TO ORDER STRAIN RELIEFS SEPARATELY

DASH	STYLE 'H'		STYLE 'A'		STYLE 'C'	
	COMPAERO	MIL-SPEC	COMPAERO	MIL-SPEC	COMPAERO	MIL-SPEC
01	N/A	N/A	CP85049/41-3A	M85049/41-3A	CP85049/2-3C	M85049/2-3C
02	CP85049/42-4D*	M85049/42-4D*	CP85049/41-4A	M85049/41-4A	CP85049/2-4C	M85049/2-4C
03	CP85049/42-6D*	M85049/42-6D*	CP85049/41-6A	M85049/41-6A	CP85049/2-6C	M85049/2-6C
04	CP85049/42-8D*	M85049/42-8D*	CP85049/41-8A	M85049/41-8A	CP85049/2-8C	M85049/2-8C
05	CP85049/42-10D*	M85049/42-10D*	CP85049/41-10A	M85049/41-10A	CP85049/2-10C	M85049/2-10C
06	CP85049/42-12D*	M85049/42-12D*	CP85049/41-12A	M85049/41-12A	CP85049/2-12C	M85049/2-12C
07	CP85049/42-16D*	M85049/42-16D*	CP85049/41-16A	M85049/41-16A	CP85049/2-16C	M85049/2-16C
08	CP85049/42-20D*	M85049/42-20D*	CP85049/41-20A	M85049/41-20A	CP85049/2-20C	M85049/2-20C
09	CP85049/42-24D*	M85049/42-24D*	CP85049/41-24A	M85049/41-24A	CP85049/2-24C	M85049/2-24C
10	CP85049/42-28D*	M85049/42-28D*	CP85049/41-28A	M85049/41-28A	CP85049/2-28C	M85049/2-28C
11	CP85049/42-32D*	M85049/42-32D*	CP85049/41-32A	M85049/41-32A	CP85049/2-32C	M85049/2-32C
12	N/A	N/A	CP85049/41-40A	M85049/41-40A	N/A	N/A

* REPLACE WITH FINISH CODE: N = ELECTROLESS NICKEL, W = CADMIUM OLIVE DRAB, K = STAINLESS STEEL



RECOMMENDED TORQUE VALUES

SECTION G

INSTALLATION TORQUE VALUES FOR CIRCULAR ELECTRICAL CONNECTOR ACCESSORIES		
ACCESSORY THREAD TORQUE: ±5 INCH POUNDS		
	CONNECTOR INTERFACE	
SHELL SIZE	D, F	A, H
8, 9, A	35	56
10, 10SL, 11, B	35	76
12, 12S, 13, C	40	108
14, 14S, 15, D	40	116
16, 16S, 17, E	40	116
18, 19, 27, F	40	116
20, 21, 37, G	80	136
22, 23, H	80	136
24, 25, 61, J	80	136
28, 29	120	148
32, 33	120	148
36	120	148
40	160	164
44	160	164
48	160	164