



**CPA123 - Receptacle**




**CPA124 - Plug**

**TABLE 1 - PROTECTIVE COVER DIMENSIONS**

SHELL SIZE	INTERFACE THREAD	STANDARD (MIL) OPTIONS - CPA123			STANDARD (MIL) OPTIONS - CPA124		
		LANYARD LENGTH	EYELET (ORDER CODE)	RING (ORDER CODE)	LANYARD LENGTH	EYELET (ORDER CODE)	RING (ORDER CODE)
10	N/A	4.0	0.167 (05)	.709 (22)	4.0	0.167 (05)	.709 (22)
12	N/A	4.5	0.167 (05)	.787 (23)	4.5	0.167 (05)	.787 (23)
14	N/A	4.5	0.167 (05)	.906 (24)	4.5	0.167 (05)	.906 (24)
16	N/A	4.5	0.167 (05)	1.024 (25)	4.5	0.167 (05)	1.024 (25)
18	N/A	4.5	0.167 (05)	1.178 (26)	4.5	0.167 (05)	1.178 (26)
20	N/A	5.0	0.182 (06)	1.266 (27)	5.0	0.182 (06)	1.266 (27)
22	N/A	5.0	0.182 (06)	1.428 (28)	5.0	0.182 (06)	1.428 (28)
24	N/A	5.5	0.182 (06)	1.535 (29)	5.5	0.182 (06)	1.535 (29)
28	N/A	7.75	0.182 (06)	1.760 (31)	7.75	0.182 (06)	1.760 (31)
32	N/A	7.75	0.218 (08)	2.140 (33)	7.75	0.218 (08)	2.140 (33)
36	N/A	7.75	0.218 (08)	2.406 (34)	7.75	0.218 (08)	2.406 (34)

**PART NUMBER BREAKDOWN**

**CPA 124 - 12 W - S 4.5 - 02**

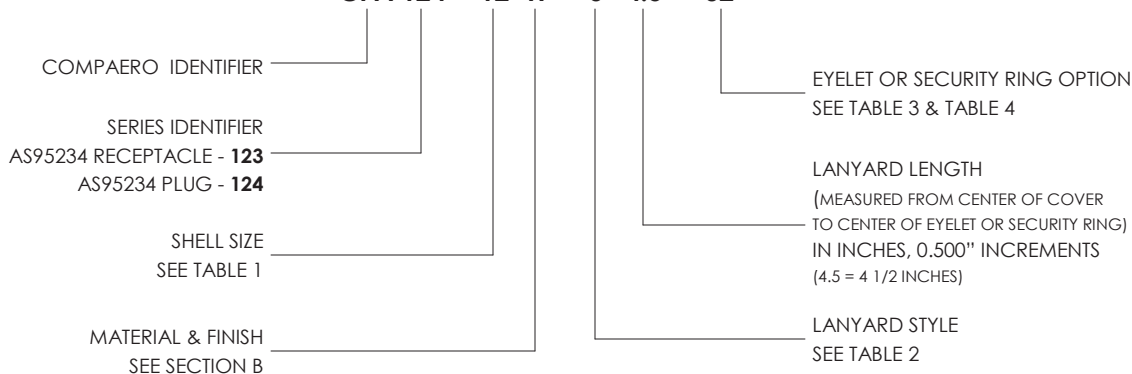

**DISCLAIMER:** All information is believed to be reliable. Readers should independently evaluate the suitability of each product for their application. Compaero makes no warranties as to the accuracy or completeness of the information herein and disclaims any liability regarding its use. Specifications are subject to change without notice. Compaero reserves the right to make changes, without notification to the customer, to processing or materials that do not affect compliance with any applicable specification. **Drawings are not to scale.**



CPA123 (Receptacle) & CPA124 (Plug)  
Protective Cover  
For Use With AS95234 Connectors

**SERIES**  
**123&124**

LANYARDS



#8 Stainless Steel Sash Chain



Stainless Steel Wire Rope with choice of Jacket Material



Nylon Rope, Black



Stainless Steel Bead Chain

TABLE 2 - LANYARD OPTIONS	
ORDERING CODE	DESCRIPTION
X	No Accessory
R	Stainless Steel Wire Rope, PVC Jacket
B	Stainless Steel Bead Chain
S	Stainless Steel Sash Chain
G	Nylon Rope, Black
Y	Stainless Steel Wire Rope, Nylon Jacket
T	Stainless Steel Wire Rope, Teflon Jacket
U	Stainless Steel Wire Rope, Polyurethane Jacket

SOLID RING


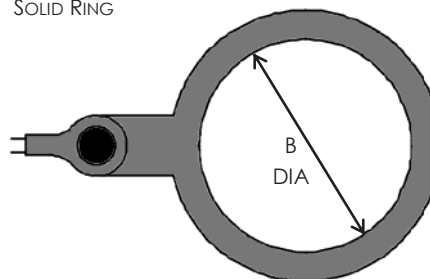


TABLE 3 EYELET SPECIFICATIONS	
Dash Number	A DIA
00	No Eyelet
01	0.140 (3.6)
02	0.167 (4.2)
03	0.197 (5.0)
04	0.125 (3.2)
05	0.156 (4.0)
06	0.182 (4.6)
07	0.191 (4.9)
08	0.218 (5.5)

TABLE 4 SOLID RING SPECIFICATIONS	
Dash Number	B DIA
20	.512 (13.0)
21	.583 (14.8)
22	.709 (18.0)
23	.787 (20.0)
24	.906 (23.0)
25	1.024 (26.0)
26	1.178 (30.0)
27	1.266 (32.2)
28	1.428 (36.3)
29	1.535 (39.0)
30	1.678 (42.6)
31	1.760 (44.7)
32	1.890 (48.0)
33	2.140 (54.4)
34	2.406 (61.1)
35	2.656 (67.5)

**DISCLAIMER:** All information is believed to be reliable. Readers should independently evaluate the suitability of each product for their application. Compaero makes no warranties as to the accuracy or completeness of the information herein and disclaims any liability regarding its use. Specifications are subject to change without notice. Compaero reserves the right to make changes, without notification to the customer, to processing or materials that do not affect compliance with any applicable specification. **Drawings are not to scale.**