



CPA 32 - Plug Cover

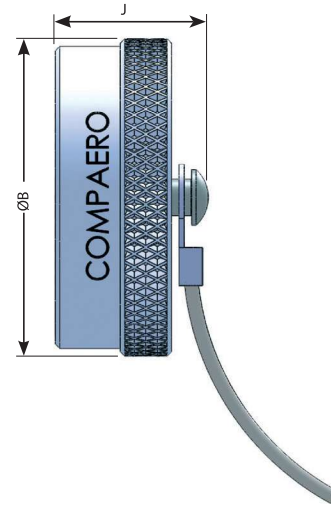

CPA 33 - Receptacle Cover

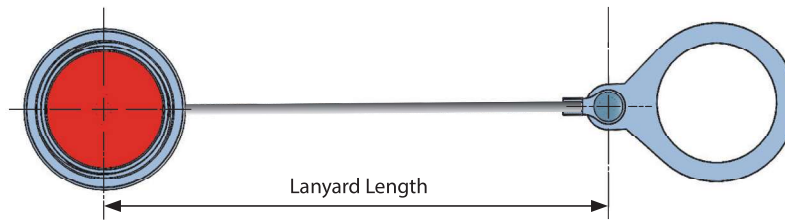

CPA 32-13 W-S5-22

<p>Compaero Identifier</p> <p>Series Identifier 32 : D38999 SERIES 3 PLUG 33 : D38999 SERIES 3 RECEPTACLE</p> <p>Shell Size</p> <p>Finish & Material See Page 5</p>	<p>Eyelet or Ring Size See Page 9 Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30° Ring)</p> <p>Lanyard Length in Inches (0.25" Increments Only) For 5 Inches use "5" For 4.5 Inches use "4.5" For 4.25 Inches use "4.25"</p> <p>Lanyard Style X - No accessory S - Stainless Steel Sash Chain G - Nylon Rope, Black GW - Nylon Rope, Green Y - Stainless Steel Wire Rope, Nylon Jacket T - Stainless Steel Wire Rope, Teflon Jacket R - Stainless Steel Wire Rope, PVC Jacket CF - Crimp Ferrule Option TR - Tie-Wrap Option B - Stainless Steel Bead Chain (See Page 8)</p>
---	--

Table 1 CPA 32 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
9	.91	23.00	1.18	30.00	5.00	127.00
11	1.02	26.00	1.18	30.00	5.00	127.00
13	1.22	31.00	1.18	30.00	5.00	127.00
15	1.30	33.00	1.18	30.00	5.00	127.00
17	1.46	37.00	1.18	30.00	5.00	127.00
19	1.57	40.00	1.18	30.00	5.00	127.00
21	1.73	44.00	1.18	30.00	5.00	127.00
23	1.81	46.00	1.18	30.00	5.00	127.00
25	1.97	50.00	1.18	30.00	5.00	127.00

* Tolerances for lanyard Length
inches: $\pm .51 / - .28$
millimeters: $+13.0 / -7.0$

Table 2 CPA 33 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
9	.91	23.00	.91	23.00	5.00	127.00
11	1.10	28.00	.91	23.00	5.00	127.00
13	1.22	31.00	.91	23.00	5.00	127.00
15	1.26	32.00	.91	23.00	5.00	127.00
17	1.46	37.00	.91	23.00	5.00	127.00
19	1.54	39.00	.91	23.00	5.00	127.00
21	1.65	42.00	.91	23.00	5.00	127.00
23	1.77	45.00	.91	23.00	5.00	127.00
25	1.93	49.00	.91	23.00	5.00	127.00

* Tolerances for lanyard Length
inches: $\pm .51 / - .28$
millimeters: $+13.0 / -7.0$