



**CPA 42 - Plug Cover**

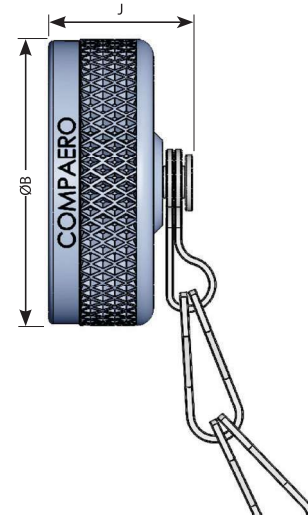

**CPA 43 - Receptacle Cover**

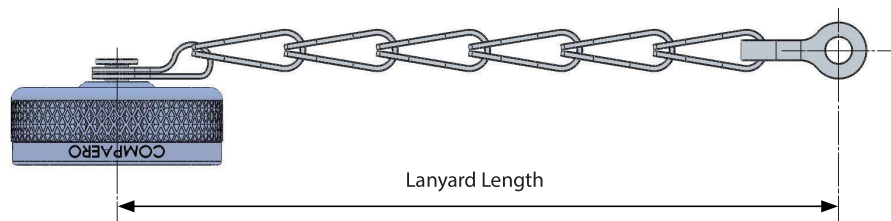

**CPA 43-12 W-S5-22**

- Compaero Identifier**
- Series Identifier**  
42 : MIL-DTL-5015 PLUG  
43 : MIL-DTL-5015 RECEPTACLE
- Shell Size**
- Finish & Material**  
See Page 5
- Eyelet or Ring Size**  
See Page 9  
Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30° Ring)
- Lanyard Length in Inches (0.25" Increments Only)**  
For 5 Inches use "5"  
For 4.5 Inches use "4.5"  
For 4.25 Inches use "4.25"
- Lanyard Style**  
X - No accessory  
S - Stainless Steel Sash Chain  
G - Nylon Rope, Black  
GW - Nylon Rope, Green  
Y - Stainless Steel Wire Rope, Nylon Jacket  
T - Stainless Steel Wire Rope, Teflon Jacket  
R - Stainless Steel Wire Rope, PVC Jacket  
CF - Crimp Ferrule Option  
TR - Tie-Wrap Option  
B - Stainless Steel bead Chain  
(See Page 8)

**Table 1 CPA 42 Plug Cover Dimensions**

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.562	14.27	.969	24.61	4.0	101.60
10	.687	17.45	.969	24.61	4.0	101.60
12	.812	20.62	1.156	29.36	4.5	114.30
14	.937	23.80	1.156	29.36	4.5	114.30
16	1.062	26.97	1.156	29.36	4.5	114.30
18	1.187	30.15	1.156	29.36	4.5	114.30
20	1.312	33.32	1.156	29.36	5.0	127.00
22	1.437	36.50	1.156	29.36	5.0	127.00
24	1.562	39.67	1.156	29.36	5.5	139.70
28	1.812	46.02	1.156	29.36	7.75	196.85
32	2.062	52.37	1.156	29.36	7.75	196.85
36	2.312	58.72	1.156	29.36	7.75	196.85
40	2.562	65.07	1.156	29.36	7.75	196.85
44	2.812	71.42	1.156	29.36	7.75	196.85
48	3.062	77.77	1.156	29.36	7.75	196.85

\* Tolerances for lanyard Length : ± one link

**Table 2 CPA 43 Receptacle Cover Dimensions**

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.688	17.48	.750	19.05	4.0	101.60
10	.815	20.70	.750	19.05	4.0	101.60
12	1.000	25.40	.750	19.05	4.5	114.30
14	1.125	28.58	.750	19.05	4.5	114.30
16	1.188	30.18	.750	19.05	4.5	114.30
18	1.344	34.14	.750	19.05	4.5	114.30
20	1.469	37.31	.750	19.05	5.0	127.00
22	1.594	40.49	.750	19.05	5.0	127.00
24	1.719	43.66	.750	19.05	5.5	139.70
28	1.969	50.01	.812	20.62	7.75	196.90
32	2.219	56.36	.812	20.62	7.75	196.90
36	2.469	62.71	.812	20.62	7.75	196.90
40	2.719	69.06	.812	20.62	7.75	196.90
44	2.969	75.41	.812	20.62	7.75	196.90
48	3.188	80.98	.812	20.62	7.75	196.90

\* Tolerances for lanyard Length : ± one link