



CPA 451 - Plug Cover

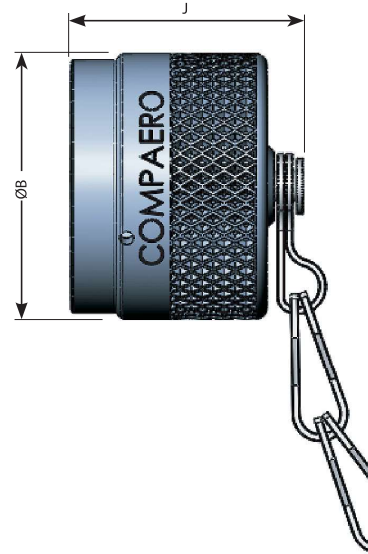

CPA 452 - Receptacle Cover

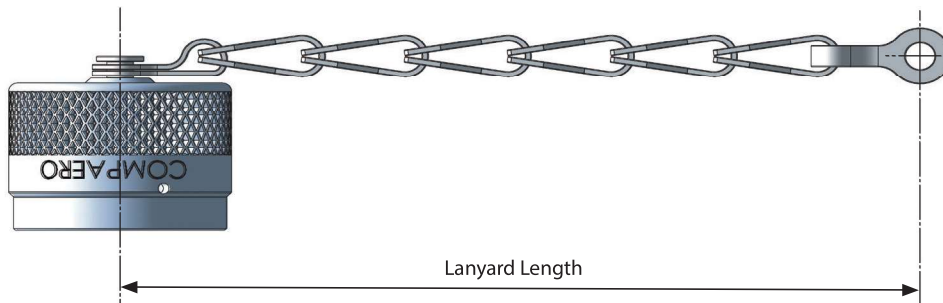

**CPA 451-13 W-S5-22**

- Compaero Identifier**
- Series Identifier**  
451: D38999 SERIES 4 PLUG  
452: D38999 SERIES 4 RECEPTACLE
- Shell Size**
- Finish & Material**  
See Page 5
- Eyelet or Ring Size**  
See Page 9  
Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30° Ring)
- Lanyard Length in Inches (0.25" Increments Only)**  
For 5 Inches use "5"  
For 4.5 Inches use "4.5"  
For 4.25 Inches use "4.25"
- Lanyard Style**  
X - No accessory  
S - Stainless Steel Sash Chain  
G - Nylon Rope, Black  
GW - Nylon Rope, Green  
Y - Stainless Steel Wire Rope, Nylon Jacket  
T - Stainless Steel Wire Rope, Teflon Jacket  
R - Stainless Steel Wire Rope, PVC Jacket  
CF - Crimp Ferrule Option  
TR - Tie-Wrap Option  
B - Stainless Steel Bead Chain  
(See Page 8)

Table 1 CPA 451 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
11	1.380	35.05	1.731	43.97	5.0	127.00
13	1.570	39.88	1.731	43.97	5.0	127.00
15	1.660	42.17	1.731	43.97	5.0	127.00
17	1.790	45.47	1.731	43.97	5.0	127.00
19	1.920	48.77	1.731	43.97	5.0	127.00
21	2.060	52.33	1.731	43.97	5.0	127.00
23	2.250	57.15	1.731	43.97	5.0	127.00
25	2.380	60.45	1.731	43.97	5.0	127.00

\* Tolerances for lanyard Length  
inches: ±.25  
millimeters: ±6.35

Table 2 CPA 452 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
11	1.047	26.59	1.375	34.93	5.0	127.00
13	1.220	30.99	1.375	34.93	5.0	127.00
15	1.346	34.19	1.375	34.93	5.0	127.00
17	1.472	37.39	1.375	34.93	5.0	127.00
19	1.583	40.21	1.375	34.93	5.0	127.00
21	1.705	43.31	1.375	34.93	5.0	127.00
23	1.831	46.50	1.375	34.93	5.0	127.00
25	1.957	49.71	1.375	34.93	5.0	127.00

\* Tolerances for lanyard Length  
inches: ±.25  
millimeters: ±6.35