



CPA 591 - Plug Cover

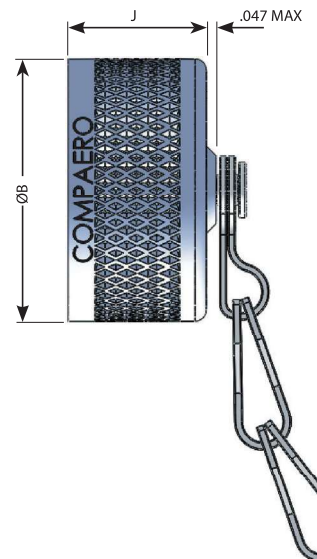

CPA 601 - Receptacle Cover

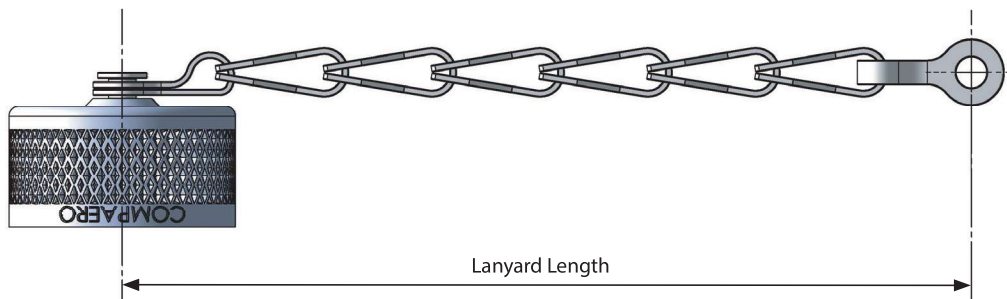

CPA 591-12 W-S5-22

Compaero Identifier

Series Identifier

591: MIL-DTL-83723 SERIES 3 THREADED PLUG
601: MIL-DTL-83723 SERIES 3 THREADED RECEPTACLE

Shell Size

Finish & Material

See Page 5

Eyelet or Ring Size

See Page 9

Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30° Ring)

Lanyard Length in Inches (0.25" Increments Only)

For 5 Inches use "5"
For 4.5 Inches use "4.5"
For 4.25 Inches use "4.25"

Lanyard Style

- X - No accessory
- S - Stainless Steel Sash Chain
- G - Nylon Rope, Black
- GW - Nylon Rope, Green
- Y - Stainless Steel Wire Rope, Nylon Jacket
- T - Stainless Steel Wire Rope, Teflon Jacket
- R - Stainless Steel Wire Rope, PVC Jacket
- CF - Crimp Ferrule Option
- TR - Tie-Wrap Option
- B - Stainless Steel Bead Chain (See Page 8)

Table 1 CPA 591 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH 1*		STD. LANYARD LENGTH 2*	
	in	mm	in	mm	in	mm	in	mm
08	.776	19.71	.767	19.48	5.00	127.00	8.00	203.20
10	.906	23.01	.767	19.48	5.00	127.00	8.00	203.20
12	1.078	27.38	.767	19.48	5.00	127.00	8.00	203.20
14	1.141	28.98	.767	19.48	5.00	127.00	8.00	203.20
16	1.266	32.16	.767	19.48	5.00	127.00	8.00	203.20
18	1.375	34.93	.767	19.48	5.00	127.00	8.00	203.20
20	1.510	38.35	.767	19.48	5.00	127.00	8.00	203.20
22	1.625	41.28	.767	19.48	5.00	127.00	8.00	203.20
24	1.760	44.70	.767	19.48	5.00	127.00	8.00	203.20

* Tolerances for lanyard Length
inches $\pm .25$
millimeters: +6.35

Table 2 CPA 601 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH 1*		STD. LANYARD LENGTH 2*	
	in	mm	in	mm	in	mm	in	mm
08	.776	19.71	.618	15.70	5.00	127.00	8.00	203.20
10	.906	23.01	.618	15.70	5.00	127.00	8.00	203.20
12	1.078	27.38	.618	15.70	5.00	127.00	8.00	203.20
14	1.141	28.98	.618	15.70	5.00	127.00	8.00	203.20
16	1.266	32.16	.618	15.70	5.00	127.00	8.00	203.20
18	1.375	34.93	.618	15.70	5.00	127.00	8.00	203.20
20	1.510	38.35	.618	15.70	5.00	127.00	8.00	203.20
22	1.625	41.28	.618	15.70	5.00	127.00	8.00	203.20
24	1.760	44.70	.618	15.70	5.00	127.00	8.00	203.20

* Tolerances for lanyard Length
inches $\pm .25$
millimeters: +6.35