



**CPA 80 - Plug Cover**

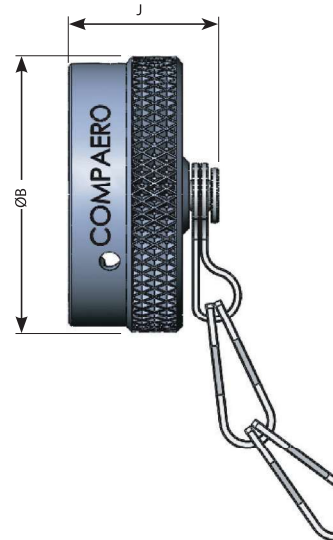

**CPA 81 - Receptacle Cover**

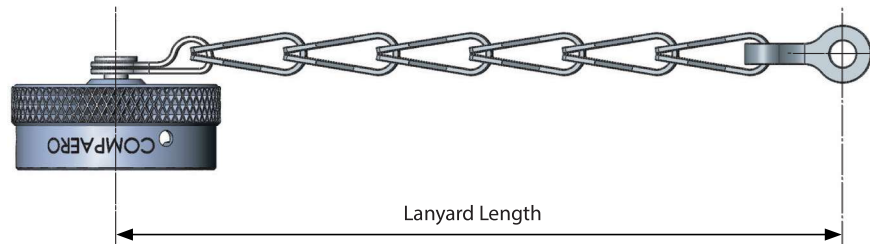

**CPA 81-12 W-S5-22**

- Compaero Identifier**
- Series Identifier**  
80: MIL-DTL-26482 PLUG  
81: MIL-DTL-26482 RECEPTACLE
- Shell Size**
- Finish & Material**  
See Page 5
- Eyelet or Ring Size**  
See Page 9  
Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30° Ring)
- Lanyard Length in Inches (0.25" Increments Only)**  
For 5 Inches use "5"  
For 4.5 Inches use "4.5"  
For 4.25 Inches use "4.25"
- Lanyard Style**  
X - No accessory  
S - Stainless Steel Sash Chain  
G - Nylon Rope, Black  
GW - Nylon Rope, Green  
Y - Stainless Steel Wire Rope, Nylon Jacket  
T - Stainless Steel Wire Rope, Teflon Jacket  
R - Stainless Steel Wire Rope, PVC Jacket  
CF - Crimp Ferrule Option  
TR - Tie-Wrap Option  
B - Stainless Steel Bead Chain (See Page 8)

**Table 1 CPA 80 Plug Cover Dimensions**

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.719	18.26	.781	19.84	3.0	76.20
10	.844	21.44	.781	19.84	3.0	76.20
12	1.000	25.40	.781	19.84	3.5	88.90
14	1.125	28.58	.781	19.84	3.5	88.90
16	1.250	31.75	.781	19.84	3.5	88.90
18	1.375	34.92	.781	19.84	3.5	88.90
20	1.500	38.10	.844	21.44	4.0	101.60
22	1.625	41.28	.844	21.44	4.0	101.60
24	1.750	44.45	.875	22.22	4.0	101.60

\* Tolerances for lanyard Length  
inches **±.50/- .25**  
millimeters: **+12.70/-6.35**

**Table 2 CPA 81 Receptacle Cover Dimensions**

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.734	18.64	.844	21.44	3.0	76.20
10	.859	21.82	.844	21.44	3.0	76.20
12	1.000	25.40	.844	21.44	3.5	88.90
14	1.125	28.58	.844	21.44	3.5	88.90
16	1.250	31.75	.844	21.44	3.5	88.90
18	1.375	34.92	.844	21.44	3.5	88.90
20	1.500	38.10	.844	21.44	4.0	101.60
22	1.625	41.28	.844	21.44	4.0	101.60
24	1.750	44.45	.875	22.22	4.0	101.60

\* Tolerances for lanyard Length  
inches **±.50/- .25**  
millimeters: **+12.70/-6.35**