



CPA 501 - Plug Cover

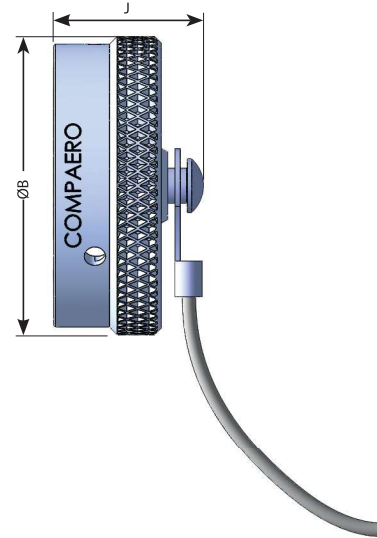

CPA 502 - Receptacle Cover

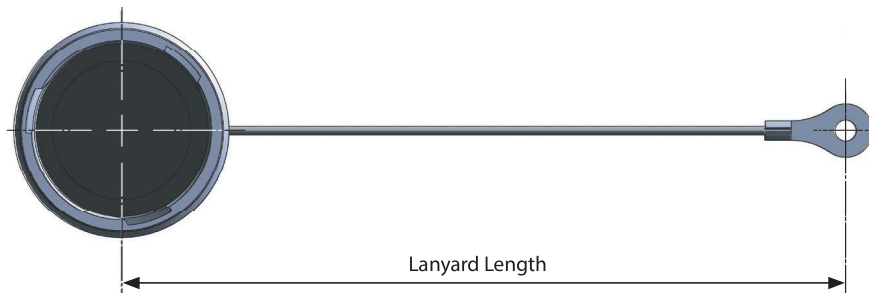

CPA 501-13 W-S5-22

- Compaero Identifier**
- Series Identifier**
501: MIL-DTL-38999 SERIES 1 PLUG
502: MIL-DTL-38999 SERIES 1 RECEPTACLE
- Shell Size**
- Finish & Material**
See Page 5
- Eyelet or Ring Size**
See Page 9
Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30" Ring)
- Lanyard Length in Inches (0.25" Increments Only)**
For 5 Inches use "5"
For 4.5 Inches use "4.5"
For 4.25 Inches use "4.25"
- Lanyard Style**
 - X** - No accessory
 - S** - Stainless Steel Sash Chain
 - G** - Nylon Rope, Black
 - GW** - Nylon Rope, Green
 - Y** - Stainless Steel Wire Rope, Nylon Jacket
 - T** - Stainless Steel Wire Rope, Teflon Jacket
 - R** - Stainless Steel Wire Rope, PVC Jacket
 - CF** - Crimp Ferrule Option
 - TR** - Tie-Wrap Option
 - B** - Stainless Steel Bead Chain (See Page 8)

Table 1 CPA 501 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
09	.82	20.83	1.16	29.46	3.0	76.20
11	.94	23.88	1.16	29.46	3.0	76.20
13	1.07	27.18	1.16	29.46	3.5	88.90
15	1.19	30.23	1.16	29.46	3.5	88.90
17	1.32	33.53	1.16	29.46	3.5	88.90
19	1.44	36.58	1.16	29.46	3.5	88.90
21	1.57	39.88	1.16	29.46	4.0	101.60
23	1.69	42.93	1.16	29.46	4.0	101.60
25	1.82	46.23	1.16	29.46	4.0	101.60

* Tolerances for lanyard Length
inches: **±.500/--.250**
millimeters: **+12.70/-6.35**

Table 2 CPA 502 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
09	.86	21.84	1.10	27.94	3.0	76.20
11	.98	24.89	1.10	27.94	3.0	76.20
13	1.16	29.46	1.10	27.94	3.5	88.90
15	1.28	32.51	1.10	27.94	3.5	88.90
17	1.41	35.81	1.10	27.94	3.5	88.90
19	1.52	38.61	1.10	27.94	3.5	88.90
21	1.65	41.91	1.10	27.94	4.0	101.60
23	1.77	44.96	1.10	27.94	4.0	101.60
25	1.89	48.01	1.10	27.94	4.0	101.60

* Tolerances for lanyard Length
inches: **±.500/--.250**
millimeters: **+12.70/-6.35**