


SERIES
53

DUMMY STORAGE RECEPTACLE
CPA53*
STANDARD



SERIES 53 - PART NUMBER BREAKDOWN / HOW TO ORDER				
CPA	53	1-	10	W
MATERIAL & FINISH				
C = ALUMINUM, ANODIZE, BLACK				
F = ALUMINUM, ELECTROLESS NICKEL				
G = ALUMINUM, HARD ANODIZE				
K = STAINLESS STEEL, PASSIVATED				
W = ALUMINUM, CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL				
SHELL SIZE				
INTERFACE				
1 = MIL-DTL-5015				
2 = MIL-DTL-26482				
3 = MIL-DTL-38999 SERIES I				
4 = MIL-DTL-38999 SERIES II				
5 = MIL-DTL-38999 SERIES III				
SERIES				
BASIC PART NUMBER				

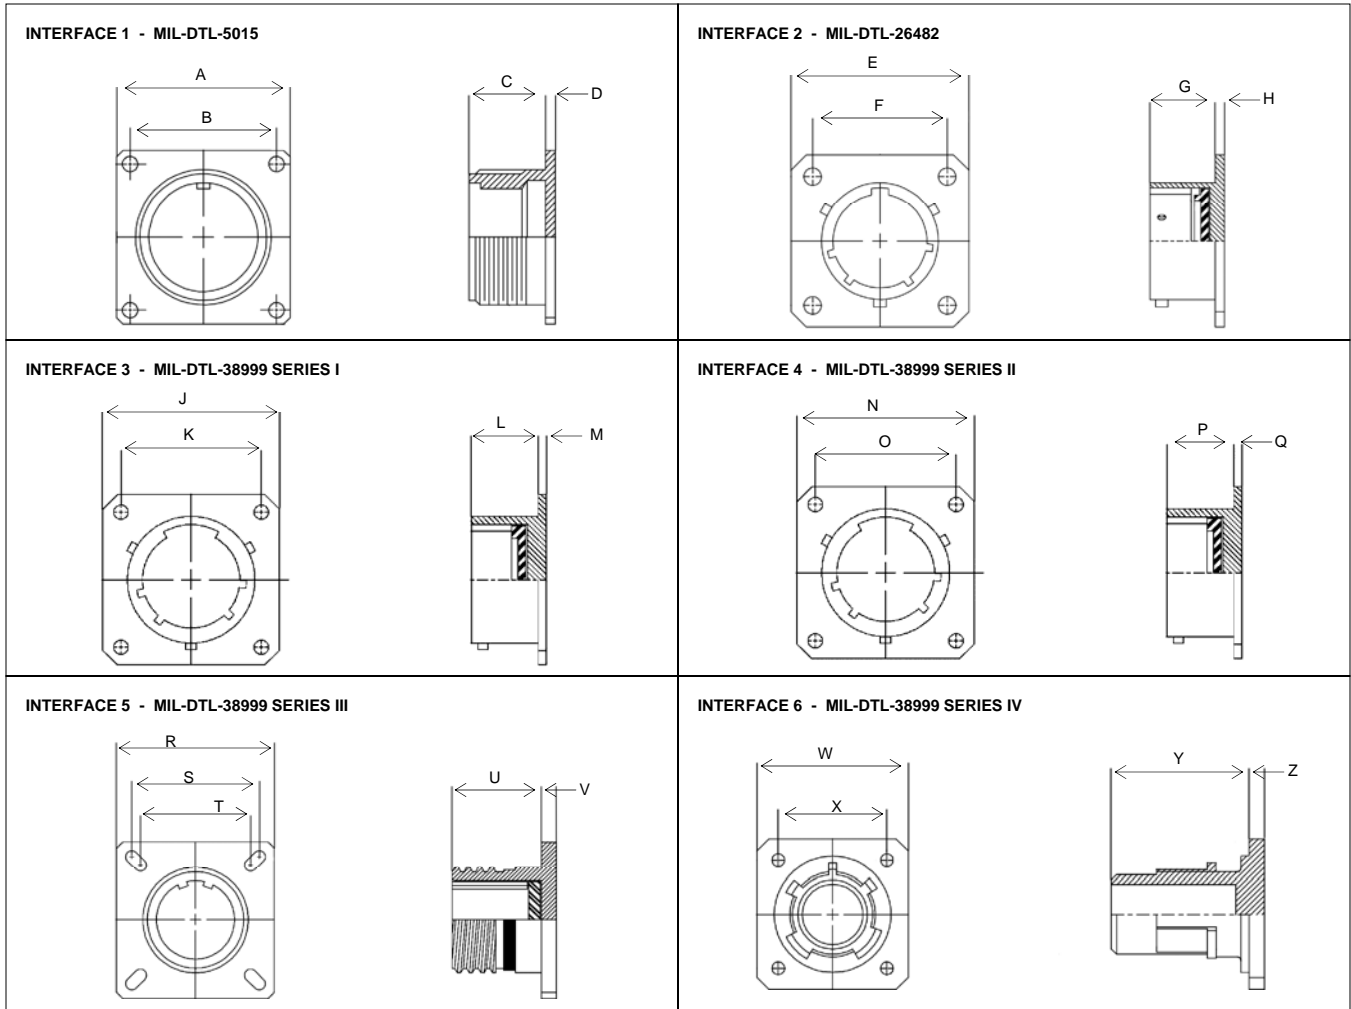

**DUMMY STOWAGE RECEPTACLE
CPA53*
STANDARD**

**SERIES
53**

MIL-DTL-5015; MIL-DTL-26482								
SHELL SIZE	A	B	C	D	E	F	G	H
8, 8S	.906 (23.0)	.594 (15.1)	.593 (15.1)	.156 (4.0)	.828 (21.0)	.594 (15.1)	.478 (12.1)	.062 (1.6)
10, 10S	1.031 (26.2)	.719 (18.3)	.593 (15.1)	.156 (4.0)	.954 (24.2)	.719 (18.3)	.478 (12.1)	.062 (1.6)
12S	1.125 (28.6)	.812 (20.6)	.593 (15.1)	.156 (4.0)	N/A	N/A	N/A	N/A
12	1.125 (28.6)	.812 (20.6)	.781 (19.8)	.156 (4.0)	1.047 (26.6)	.812 (20.6)	.478 (12.1)	.062 (1.6)
14S	1.219 (31.0)	.906 (23.0)	.593 (15.1)	.156 (4.0)	N/A	N/A	N/A	N/A
14	1.219 (31.0)	.906 (23.0)	.781 (19.8)	.156 (4.0)	1.141 (29.0)	.906 (23.0)	.478 (12.1)	.062 (1.6)
16S	1.312 (33.3)	.969 (24.6)	.593 (15.1)	.156 (4.0)	N/A	N/A	N/A	N/A
16	1.312 (33.3)	.969 (24.6)	.781 (19.8)	.156 (4.0)	1.234 (31.3)	.969 (24.6)	.478 (12.1)	.062 (1.6)
18	1.406 (35.7)	1.062 (27.0)	.781 (19.8)	.203 (5.2)	1.328 (33.7)	1.062 (27.0)	.478 (12.1)	.062 (1.6)
20	1.531 (38.9)	1.156 (29.4)	.781 (19.8)	.203 (5.2)	1.453 (36.9)	1.156 (29.4)	.572 (14.5)	.094 (2.4)
22	1.656 (42.1)	1.250 (31.8)	.781 (19.8)	.203 (5.2)	1.578 (40.1)	1.250 (31.8)	.572 (14.5)	.094 (2.4)
24	1.781 (45.2)	1.375 (34.9)	.843 (21.4)	.203 (5.2)	1.703 (43.3)	1.375 (34.9)	.605 (15.4)	.094 (2.4)
28	2.031 (51.6)	1.562 (39.7)	.843 (21.4)	.203 (5.2)	N/A	N/A	N/A	N/A
32	2.281 (57.9)	1.750 (44.5)	.906 (23.0)	.359 (9.1)	N/A	N/A	N/A	N/A
36	2.531 (64.3)	1.938 (49.2)	.906 (23.0)	.359 (9.1)	N/A	N/A	N/A	N/A

MIL-DTL-38999 SERIES I, MIL-DTL-38999 SERIES II								
SHELL SIZE	J	K	L	M	N	O	P	Q
8, 9	.949 (24.1)	.719 (18.3)	.730 (18.5)	.085 (2.2)	.823 (20.9)	.594 (15.1)	.449 (11.4)	.063 (1.6)
10, 11	1.042 (26.5)	.812 (20.6)	.730 (18.5)	.085 (2.2)	.949 (24.1)	.719 (18.3)	.449 (11.4)	.063 (1.6)
12, 13	1.136 (28.9)	.906 (23.0)	.730 (18.5)	.085 (2.2)	1.042 (26.5)	.812 (20.6)	.449 (11.4)	.063 (1.6)
14, 15	1.230 (31.2)	.969 (24.6)	.730 (18.5)	.085 (2.2)	1.136 (28.9)	.906 (23.0)	.449 (11.4)	.063 (1.6)
16, 17	1.323 (33.6)	1.062 (27.0)	.730 (18.5)	.085 (2.2)	1.230 (31.2)	.969 (24.6)	.449 (11.4)	.063 (1.6)
18, 19	1.449 (36.8)	1.156 (29.4)	.730 (18.5)	.085 (2.2)	1.323 (33.6)	1.062 (27.0)	.449 (11.4)	.063 (1.6)
20, 21	1.573 (40.0)	1.250 (31.8)	.700 (17.8)	.115 (2.9)	1.449 (36.8)	1.156 (29.4)	.449 (11.4)	.063 (1.6)
22, 23	1.699 (43.2)	1.375 (34.9)	.700 (17.8)	.115 (2.9)	1.573 (40.0)	1.250 (31.8)	.449 (11.4)	.063 (1.6)
24, 25	1.823 (46.3)	1.500 (38.1)	.700 (17.8)	.115 (2.9)	1.699 (43.2)	1.375 (34.9)	.449 (11.4)	.063 (1.6)

MIL-DTL-38999 SERIES III, MIL-DTL-38999 SERIES IV									
SHELL SIZE	R	S	T	U	V	W	X	Y	Z
9 (A)	.949 (24.1)	.719 (18.3)	.594 (15.1)	.843 (21.4)	.110 (2.8)	N/A	N/A	N/A	N/A
11 (B)	1.043 (26.5)	.812 (20.6)	.719 (18.3)	.843 (21.4)	.110 (2.8)	1.051 (26.7)	.812 (20.6)	.819/.756	.094 (2.4)
13 (C)	1.138 (28.9)	.906 (23.0)	.812 (20.6)	.843 (21.4)	.110 (2.8)	1.146 (29.1)	.906 (23.0)	.819/.756	.094 (2.4)
15 (D)	1.232 (31.3)	.969 (24.6)	.906 (23.0)	.843 (21.4)	.110 (2.8)	1.240 (31.5)	.969 (24.6)	.819/.756	.094 (2.4)
17 (E)	1.322 (33.6)	1.062 (27.0)	.969 (24.6)	.843 (21.4)	.110 (2.8)	1.335 (33.9)	1.062 (27.0)	.819/.756	.094 (2.4)
19 (F)	1.448 (36.8)	1.156 (29.4)	1.062 (27.0)	.843 (21.4)	.110 (2.8)	1.461 (37.1)	1.156 (29.4)	.819/.756	.094 (2.4)
21 (G)	1.574 (40.0)	1.250 (31.8)	1.156 (29.4)	.811 (20.6)	.137 (3.5)	1.583 (40.2)	1.250 (31.8)	.819/.756	.126 (3.2)
23 (H)	1.700 (43.2)	1.375 (34.9)	1.250 (31.8)	.811 (20.6)	.137 (3.5)	1.709 (43.4)	1.375 (34.9)	.819/.756	.126 (3.2)
25 (J)	1.822 (46.3)	1.500 (38.1)	1.375 (34.9)	.811 (20.6)	.137 (3.5)	1.835 (46.6)	1.500 (38.1)	.819/.756	.126 (3.2)

DISCLAIMER

ALL INFORMATION IN THIS CATALOG, INCLUDING ILLUSTRATIONS, IS BELIEVED TO BE RELIABLE. READERS, HOWEVER, SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF EACH PRODUCT FOR THEIR APPLICATION. COMPAERO MAKES NO WARRANTIES AS TO THE ACCURACY OR COMPLETENESS OF THE INFORMATION, AND DISCLAIMS ANY LIABILITY REGARDING ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. IN ADDITION, COMPAERO RESERVES THE RIGHT TO MAKE CHANGES—WITHOUT NOTIFICATION TO CUSTOMERS—TO PROCESSING OR MATERIALS THAT DO NOT AFFECT COMPLIANCE WITH ANY APPLICABLE SPECIFICATION.